



octoBRI PCI ISDN

Configuration Overview

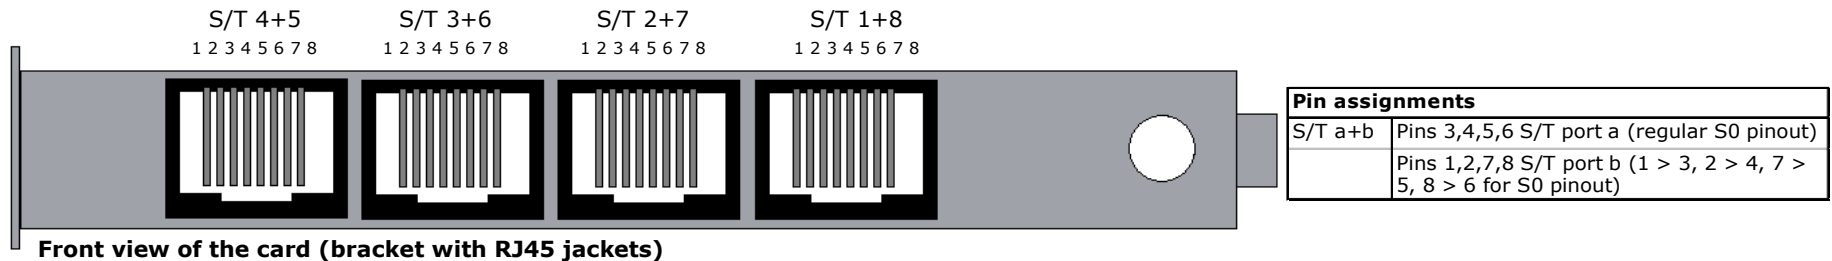

Pin assignments	
S/T a+b	Pins 3,4,5,6 S/T port a (regular S0 pinout)
	Pins 1,2,7,8 S/T port b (1 > 3, 2 > 4, 7 > 5, 8 > 6 for S0 pinout)

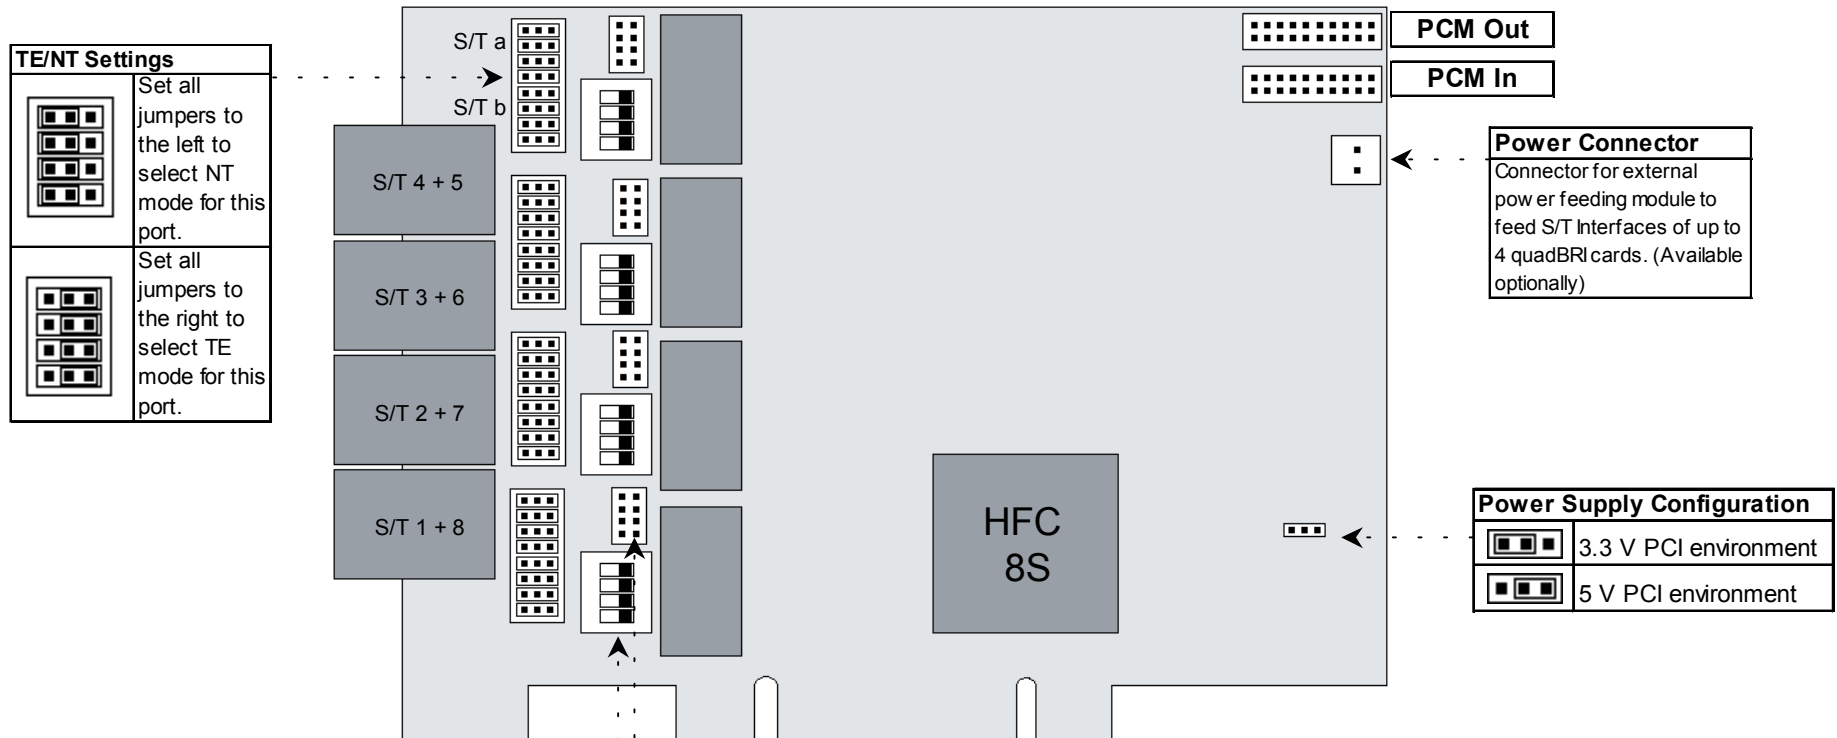

TE/NT Settings

Set all jumpers to the left to select NT mode for this port.

Set all jumpers to the right to select TE mode for this port.

Power Connector

Connector for external power feeding module to feed S/T Interfaces of up to 4 quadBRI cards. (Available optionally)

Power Supply Configuration

3.3 V PCI environment

5 V PCI environment

Termination of S/T Interface (100 W)

	Both Switches in ON Position : Termination = ON
	Both Switches in OFF Position : Termination = OFF

Power Feeding (only for NT Mode)

	Power feeding enabled for the corresponding port if jumpers set (PFM required)
	Not powered if no jumpers set.

Warning

This equipment will be inoperable when main power fails

