



# octoBRI PCI ISDN

## Configuration Overview

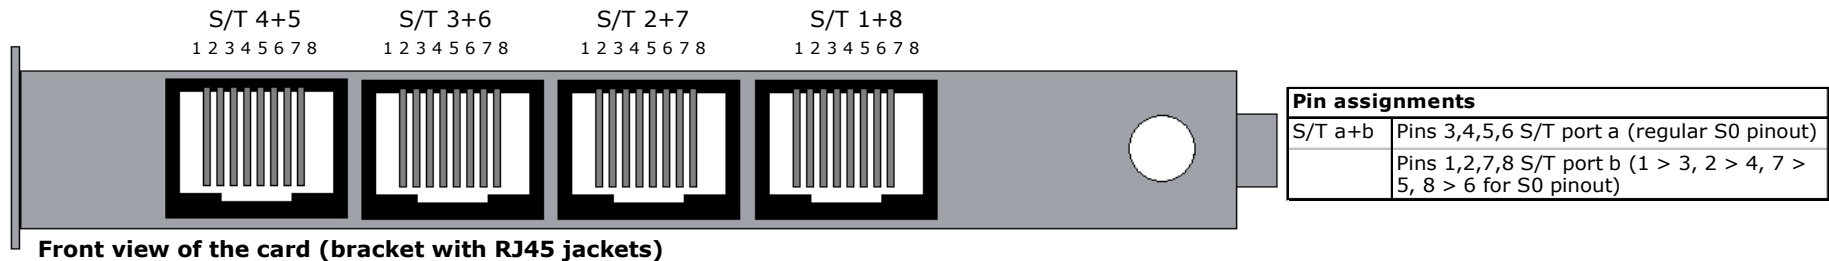

Pin assignments	
S/T a+b	Pins 3,4,5,6 S/T port a (regular S0 pinout)
	Pins 1,2,7,8 S/T port b (1 > 3, 2 > 4, 7 > 5, 8 > 6 for S0 pinout)

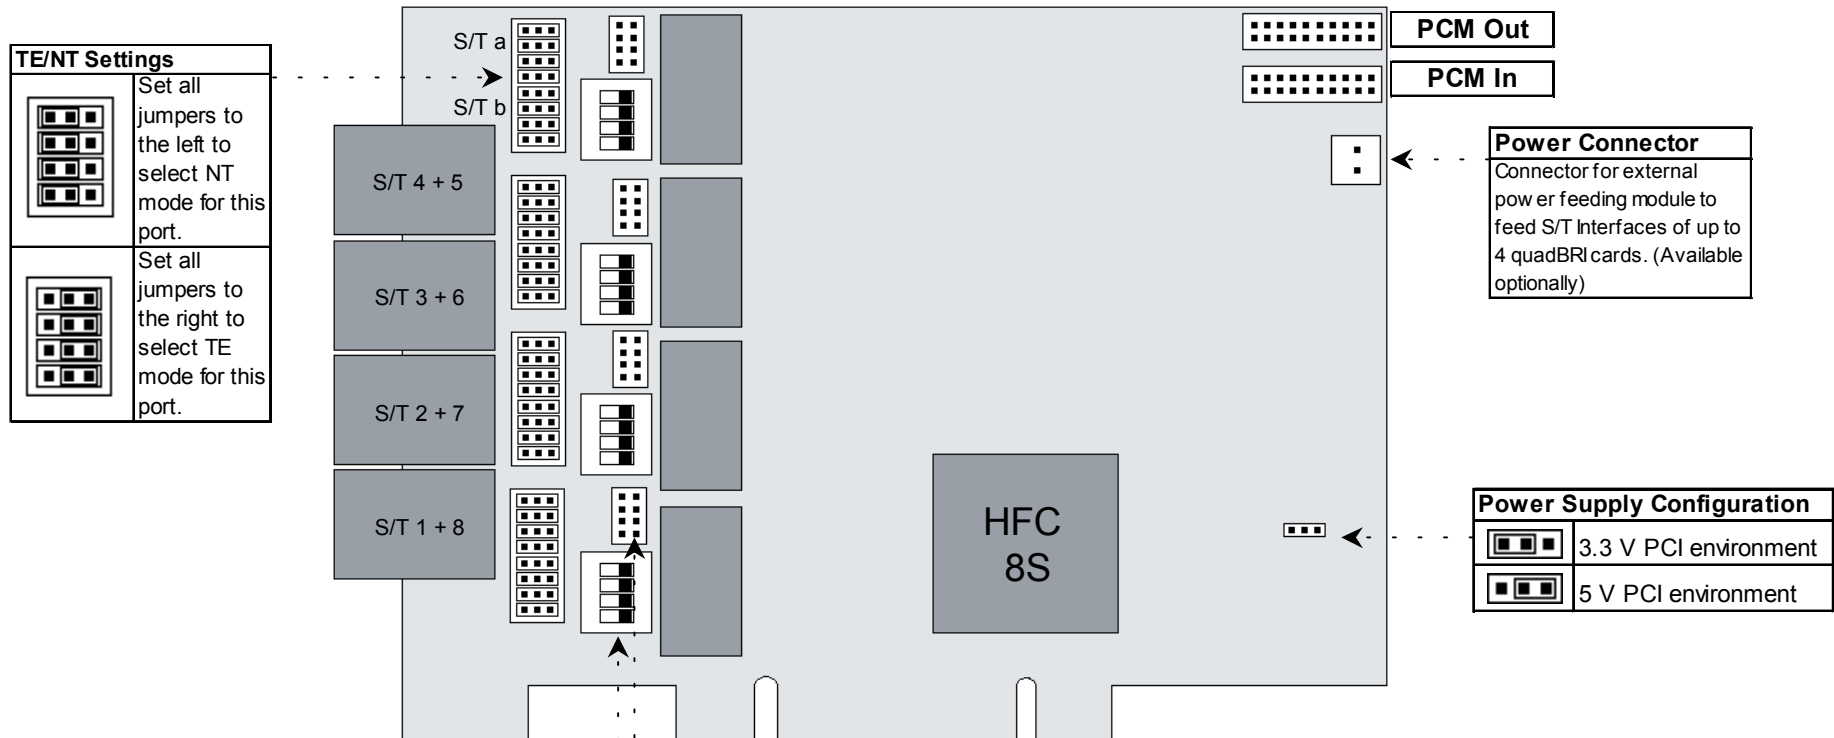

**TE/NT Settings**

Set all jumpers to the left to select NT mode for this port.

Set all jumpers to the right to select TE mode for this port.

**Power Connector**

Connector for external power feeding module to feed S/T Interfaces of up to 4 quadBRI cards. (Available optionally)

**Power Supply Configuration**

3.3 V PCI environment

5 V PCI environment

**Termination of S/T Interface (100 W)**

	Both Switches in ON Position : Termination = ON
	Both Switches in OFF Position : Termination = OFF

**Power Feeding (only for NT Mode)**

	Power feeding enabled for the corresponding port if jumpers set (PFM required)
	Not powered if no jumpers set.

**Warning**

This equipment will be inoperable when main power fails

