

# unoBRI miniPCI ISDN


## Configuration Overview

**NT/TE Settings**

Set all jumpers to the left to select NT mode for this port.

Set all jumpers to the right to select TE mode for this port.


**miniPCI connector**  
Connector for the miniPCI card.

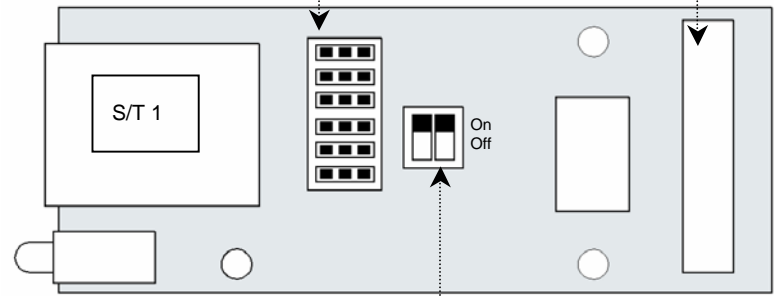

**Termination of S/T Interface (100 Ω)**

	Both Switches in ON Position : Termination = ON
	Both Switches in OFF Position : Termination = OFF

**Connectors for the RJ45 Board**

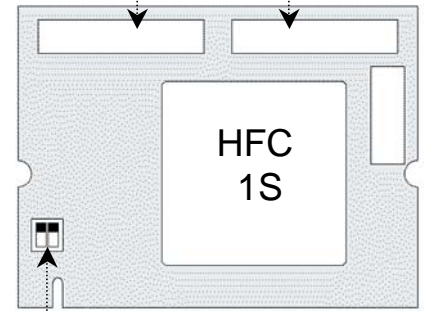

**Card ID switches**  
DIP switches 1 to 3 can be used to set the card ID (very useful for remotely identifying individual cards)

Card-ID	0	1	2	3
SW 1	OFF	ON	OFF	ON
SW 2	OFF	OFF	ON	ON

**Warning**  
This equipment will be inoperable when main power fails

